


# TD-E2128-TM

2MP HD Face Recognition Terminal

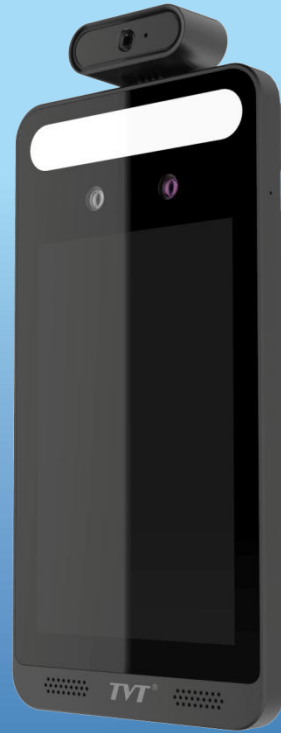

- 8 inch LCD screen
- Support IR high-accuracy body temperature measurement
- The face wearing masks also can be recognized
- It will trigger voice alarm when abnormal body temperature and no mask are detected
- Support liveness detection, avoiding picture and video cheating
- Deep learning algorithm, high face recognition accuracy rate
- Support 1:N recognition mode
- Special cameras for face recognition, dramatically enhance recognition rate in the backlight environment
- Support tamper alarm
- Stand-alone operation
- Support remote live view and two-way talk

Shenzhen TVT Digital Technology Co., LTD.

Address: 23<sup>rd</sup> Floor, Block B4, Building NO.9, Shenzhen Bay Eco-Technology Park, Nanshan District, Shenzhen, Guangdong Province, P.R. China

Tel: +86-755-36995888

Website: <http://en.tvt.net.cn>

Fax: +86-755-33104777

E-mail: [overseas@tvt.net.cn](mailto:overseas@tvt.net.cn)

## Specifications


Model	TD-E2128-TM
<b>Performance</b>	
OS	Embedded Linux
Storage	8Gb DDR3 +16GB EMMC
<b>Screen</b>	
Display Screen	8inch LCD screen; resolution: 1280x800; contrast: 500:1
Brightness	500 lux
Control Interface	I2C
<b>Temperature Measurement</b>	
Temperature Measuring Range	0~50°C
Accuracy	± 0.3°C
Measuring Distance	0.3~0.5m
<b>Face Recognition</b>	
Sensor	1/2.7
Lens	2MP dual-lens, f=3.97mm @ F1.6
Lens Mount	M12
WDR	120db
Height Range of Face Recognition	1.2m-2.2m (the recommended installation height is 1.45m)
Face Recognition Distance	0.3m-2m
Recognition Mode	Face: 1 : N
Recognition Duration	≤ 0.5 s per person
Face Capacity	20,000
Recognition Accuracy	99.7%
<b>Supplementary Light</b>	
Fill-in Light	Soft white light, IR light
White Light Distance	1-3m
<b>Smart Linkage</b>	
Screen Wakeup	Yes
Light Adjustment	Yes
Snapshot	Yes
<b>Audio</b>	

Two-way Talk	Yes (noise reduction and echo cancellation)
Audio Input	1CH built-in MIC
Audio Output	Built-in speaker
<b>Interface</b>	
Network Interface	10/100Mbps self-adaptive Ethernet port x1
Alarm Input	2CH
Alarm Output	2 CH
Wiegand Interface	Wiegand input/output ( 26/34 )
RS485	RS485x1 (half duplex)
Door Lock Output	Relay output, NO/NC(optional), delay setting supported
SD Card Interface	1 micro SD card slot, up to 128G
USB Interface	USB x1
Anti-Tamper Interface	1 button
Exit Button	1
Reset Button	1
<b>Others</b>	
Power	12V @1A
Power Management	Screen sleep, screen protection
Power Consumption	<12W
Weight	Approx. 1.2KG
Installation	Wall Mounting , Pole Mounting, Embedded Installation, Desktop
Protection	IP66, Surge Protection and Voltage Transient Protection
Working Environment	-20°C~60°C , <95% (non-condensing)
Dimensions(mm)	301.8x138.6x34.2

## Available Model

Available Model	TD-E2128-TM	Face Recognition Terminal
-----------------	-------------	---------------------------

Dimensions

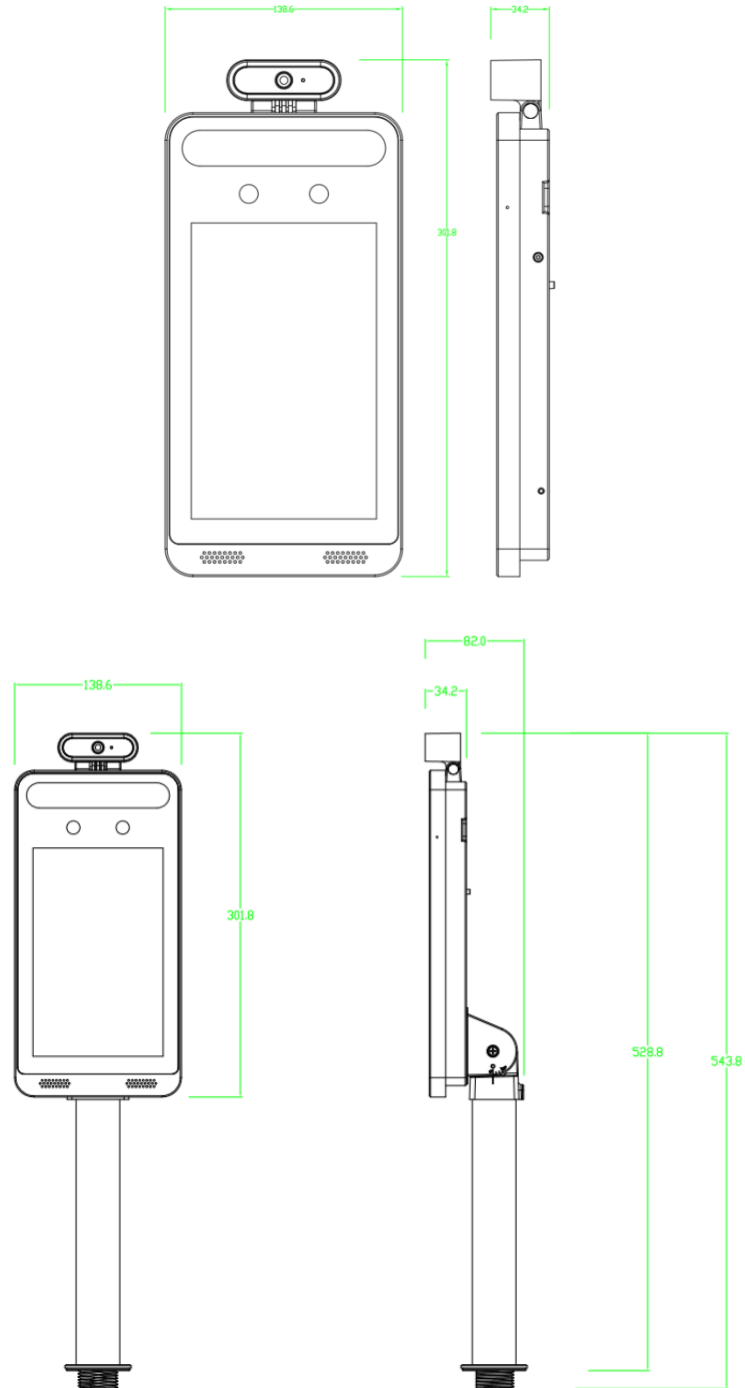

(Note: Pole mounting bracket is optional)

